


# TECHNICAL DATA SHEET

## PRODUCT



## INSTALLATION

1. Positioned above the eaves skirt protector directly above the fascia board. The combs must face outwards away from the roof.
2. Fix into top of fascia board through the slots provided, securing with clot nails along the whole length of the eaves. Bed bottom row of tiles onto the comb
3. If a fascia vent has been installed, the eaves comb filler will need to be fixed through the fascia vent into the fascia board.

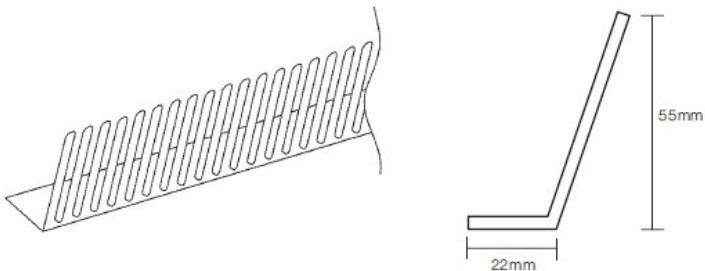

## USES

At the eaves of a roof  
Below profiled roof tiles to exclude entry of birds and vermin  
Self adjusts to suit any profile tile

## FEATURES & BENEFITS

Effective, quick and easy to fit  
Lightweight, durable and totally resistant to decay  
Integral slots allows for easy fixing  
Supplied in convenient 1m lengths  
Suitable for new build or refurbishment applications  
Can be used to comply with Building Regulations Approved Document C and BS5534

## Product Details

Size	1.0m long x 22mm x 55mm high
Material	Injection moulded in polypropylene
Colour	BLACK
Code	IEC55
Weight	19kg
Packaging	50 per carton